



## strapping products & consumables

➤ Edgeboards	56	➤ Strapping Seals	69
➤ Stainless Steel Strapping	57	➤ Safeguard Strapping Seals	70
➤ Slipguard Anti-Slip Sheets	57	➤ Edge Protectors	72
➤ Kit Start Strapping Kits	58	➤ Steel Strapping	73
➤ Strapping Tools for Polyprop Strapping	60	➤ Polyprop Strapping	74
➤ Battery Powered Polyprop/Polyester Tools	62	➤ Trimax Polyester Strapping	75
➤ Tools for Cord & Composite Polyester Strapping	64	➤ Woven Cord Polyester & Polyester Strapping	76
➤ Tools for Steel Strapping	65	➤ Auto & Semi-Auto Strapping Machines	77
➤ Strapping Dispensers	67	➤ Plastic Pallets	80
➤ Strapping Buckles & Stainless Steel Strapping	68		



## kraftek Eco Friendly Edge Boards

- Low Cost
- 100 % Recyclable
- Vast range of stock sizes

Code	Length	Width	Thickness	Qty Per Pack	Qty Per Pallet	
KVB354532	532mm	35mm x 35mm	4mm	25	5100	3.45
KVB5035580	580mm	50mm x 50mm	3.5mm	50	3150	3.80
KVB5035780	780mm	50mm x 50mm	3.5mm	50	2250	4.20
KVB7538	800mm	75mm x 75mm	3mm	25	2250	6.30
KVB35391	910mm	35mm x 35mm	3mm	50	6000	6.05
KVB351000	1000mm	35mm x 35mm	2mm	50	6300	5.90
KVB353	1000mm	35mm x 35mm	3mm	50	6000	6.50
KVB502	1000mm	50mm x 50mm	2mm	50	5400	
KVB503	1000mm	50mm x 50mm	3mm	50	2700	9.70
KVB603	1000mm	60mm x 60mm	3mm	25	2750	11.45
WEB1000-3	1000mm	100mm x 100mm	3mm	25	1250	
KVB60311-40	1100mm	60mm x 60mm	3mm	40	2800	
KVB35312	1200mm	35mm x 35mm	3mm	50	4200	8.00
KVB50312	1200mm	50mm x 50mm	3mm	50	2700	11.60
KVB50351280	1280mm	50mm x 50mm	3.5mm	50	2250	6.50
KVB35315	1500mm	35mm x 35mm	3mm	50	4200	9.80
KVB50315	1500mm	50mm x 50mm	3mm	50	2700	13.40
KVB35175	1750mm	35mm x 35mm	3mm	50	4200	11.35
KVB503175	1750mm	50mm x 50mm	3mm	50	2700	13.60
KVB35318	1800mm	35mm x 35mm	3mm	50	4200	11.85
KVB50318	1800mm	50mm x 50mm	3mm	50	2700	17.85
KVB75318	1800mm	75mm x 75mm	3mm	25	2000	13.80
WEB1830	1830mm	100mm x 100mm	5mm	20	1120	23.10
KVB35320	2000mm	35mm x 35mm	3mm	50	4200	14.20
KVB50320	2000mm	50mm x 50mm	3mm	50	2700	19.25
KVB60320	2000mm	60mm x 60mm	3mm	25	2750	21.95



### Moisture Resistant Kraftek Edgeboards

Use Moisture Resistant Kraftek for outdoor applications that are exposed to moisture. Kraft board also available.

Code	Length	Width	Thickness	Qty Per Pack	Qty Per Pallet	
MRVB353	900mm	35mm x 35mm	3mm Moisture Resistant	50	4000	6.0
MRVB3531000	1000mm	35mm x 35mm	3mm Moisture Resistant White	25	5000	3.45





# trans tarp

A new range of high quality, fully eyeleted, durable industrial tarpaulins designed to maintain the quality and product integrity of your stored products, both for outside and inside storage applications.



Available in 5 different sizes to suit your storage or weatherproofing application



## Transtarp Industrial Tarpaulins

Code	Description	
TP4102	Industrial Tarpaulin 3m x 2m Fully Eyeleted	0.55
TP4103	Industrial Tarpaulin 5m x 4m Fully Eyeleted	1.80
TP4104	Industrial Tarpaulin 8m x 5m Fully Eyeleted	3.45
TP4105	Industrial Tarpaulin 10m x 6m Fully Eyeleted	4.95
TP4106	Industrial Tarpaulin 12m x 8m Fully Eyeleted	8.45



# slipguard

anti-slip sheets



To complement our range of Logistics Packaging Products, we are now pleased to present our new range of Anti-Slip Layer Sheets



- Stabilise pallet loads of sacks, bags and cartons
- Reduction of secondary packaging, such as stretchfilm & strapping
- Efficient on all materials - paper, corrugated, cartons, glass and plastic packing
- Water repellent, ideal for preventing moisture damage
- High performance - effective up to angles of 45°
- 100% recyclable
- Unique anti-slip coating

## Anti-Slip Sheets Now in Stock!

Code: ASL0812-10  
800mm x 1200mm, 100gsm Anti-Slip Sheet  
Packed 200 sheets/box or Bulk Packed 5000 sheets/pallet

Code: ASL1012-10  
1000mm x 1200mm, 100gsm Anti-Slip Sheet  
Packed 200 sheets/box or Bulk Packed 5000 sheets/pallet



Buy These  
Products as  
Kits for Further  
Cost Savings

The one-stop solution for all your strapping requirements from the Pro-Series professional packaging range.



#### Kit comprises of:

- 600 mtrs of black strapping
- 200 Plastic Buckles

### BSK600

BUCKLE STRAP KIT



#### Kit comprises of:

- 600 mtrs of black strapping
- 200 12mm Semi Open Seals (S034)

### SBX600

STRAP BOX



#### Kit comprises of:

- 12mm Tensioner (TST30)
- 12mm Sealer (SGP12)
- 600 mtrs of black strapping
- 200 12mm Semi Open Seals (S034)

### PPSK5

STARTER PACK



#### Kit comprises of:

- Combination Tool (B12)
- 600 mtrs of black strapping
- 200 12mm Semi Open Seals (S034)

### PPSK6

STARTER PACK



#### Kit comprises of:

- Dispenser (PSD4)
- 12mm Tensioner (TST30)
- 12mm Sealer (SGP12)
- Coil of Strapping (TT45 12mm x 1500mtr)
- 500 Seals (S034)

\*Strap supplied in black

### PPSK8

TENSIONER/SEALER KIT



#### Kit comprises of:

- Trolley (PD40)
- 12mm Tensioner (TST30) & 12mm Sealer (SGP12)
- Coil of Strapping (TT45 12mm x 1500mtr)
- 500 Seals (S034)

\*Strap supplied in black

### PPSK10

TENSIONER/SEALER KIT




#### Kit comprises of:

- Trolley (PD40)
- Combination Tool (SPC12)
- Coil of Strapping (TT45 12mm x 1500mtr)
- 500 Seals (S034)

\*Strap supplied in black

### PPSK20

COMBI KIT

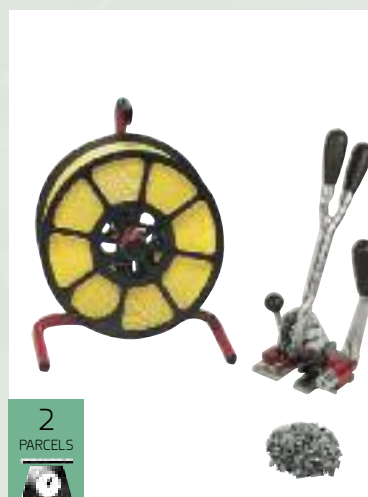

#### Kit comprises of:

- Dispenser (PSD4)
- Combination Tool (B12)
- Coil of Strapping (TT45 12mm x 1500mtr)
- 2000 Seals (S034)

\*Strap supplied in black

### PPSK44

COMBI KIT



## POLYESTER STRAPPING KITS



5kg

### Kit comprises of:

- 1 coil 13mm x 500mtr Cord
- Polyester Strap 375kg B/S
- 200 x CB4G Galvex metal buckles

## CSK

PORTABLE CORD POLYESTER STARTER KIT



2 PARCELS

### Kit comprises of:


- 1 coil of woven polyester strap
- CSM20 Mobile Trolley
- CST20 Tensioner
- 1000 metal buckles

## WPSK

WOVEN POLYESTER STARTER KITS

WPSK13  
13mm WPH40 Kit


WPSK16  
16mm WPH55 Kit

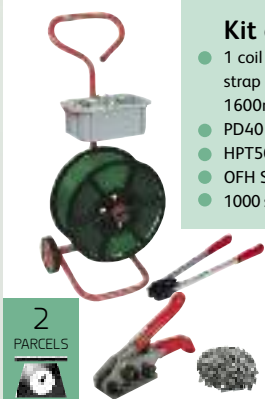WPSK19  
19mm WPH65 Kit


2 PARCELS

### Kit comprises of:

- 1 coil of extruded polyester strap (PTR25 12.5mm x 1600mtr)
- PD40 Mobile Trolley
- HPT50 Tensioner
- OFH Sealer (12mm)
- 1000 serrated clips (SER 12SG)

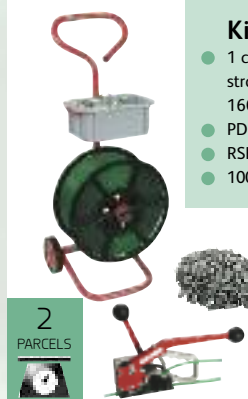**EXPSK13**  
13mm PTR25 Kit


2 PARCELS

### Kit comprises of:


- 1 coil of extruded polyester strap (PTR25 12.5mm x 1600mtr)
- PD40 Mobile Trolley
- RSK 12 Combi Tool
- 1000 serrated clips (SER 12SG)

**EPK13**  
13mm Extruded Combi Starter Kit


2 PARCELS

### Kit comprises of:

- 1 coil of extruded polyester strap (PT30 12.5mm x 2000mtr)
- MW60 H.D. Trolley
- RSK 12 Combi Tool
- 1000 serrated clips (SER 12SG)

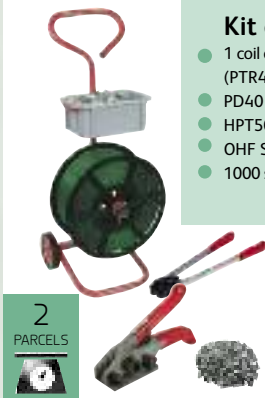**EHD13**  
Heavy Duty Combi Kit


2 PARCELS

### Kit comprises of:

- 1 coil of extruded polyester strap (PTR45 15.5mm x 1200mtr)
- PD40 Mobile Trolley
- HPT50 Tensioner
- OFH Sealer (16mm)
- 1000 serrated clips (SER 16SG)

**EXPSK16**  
16mm PTR45 Kit


2 PARCELS

### Kit comprises of:

- 1 coil of extruded polyester strap (PTR45 15.5mm x 1200mtr)
- PD40 Mobile Trolley
- RSK 16 Combi Tool
- 1000 serrated clips (SER 16SG)

**EPK16**  
16mm Extruded Combi Starter Kit


2 PARCELS

### Kit comprises of:

- 1 coil of black polyester strap (PT40 15.5mm x 1750mtr x 440kg B/S)
- MW60 H.D. Trolley
- RSK 16 Combi Tool
- 1000 serrated clips (SER 16SG)

**EHD16**  
Heavy Duty Combi Kit

## STEEL STARTER STRAPPING KITS



3 PARCELS

### Kit comprises of:

- 1 coil of ribbon wound steel strapping
- 1 SD32 Strapping Dispenser
- 1 TS Steel Strap Sealer
- 1 TLS Steel Strap Tensioner
- 2000 Snap-On Seals

SSC04 steel strap cutter recommended - not included in this kit

## TSSK

STEEL STRAPPING TENSIONER / SEALER STARTER KITS

TSSK13  
13mm Kit

TSSK16  
16mm Kit

TSSK19  
19mm Kit


3 PARCELS

### Kit comprises of:

- 1 coil of ribbon wound steel strapping
- 1 SD32 Strapping Dispenser
- 1 QST Sealless Combination Tool

## SCSSK

STEEL STRAPPING COMBI STARTER KITS

SCSSK13  
13mm Kit

SCSSK16  
16mm Kit

SCSSK19  
19mm Kit



## Polyprop Combination Tools

For Polyprop Strapping over 0.7mm thick, we recommend the PPC Tool or RSK Tool



use SO34 Semi Open Seal

B12-12mm budget combination tool for polyprop strapping - available in 12mm only.



Pro-series **B12**



SPC12 use SO34 Semi Open Seal  
SPC16 use SO16 Semi Open Seal

SPC12/16 12mm/16mm standard combi tool for polyprop strapping. Available in 12mm or 16mm. State size when ordering.



Pro-series **12mm SPC12  
16mm SPC16**



10mm tool available on request - use with SO10 semi-open seals

PPC12 use SO34 or SO1232 Semi Open Seal  
PPC16 use SO16 or SO1632 Semi Open Seal

PPC12/16 - 12mm/16mm heavy duty combi tool for polyprop strapping. Simple and easy to operate, high tension capacity, optimum sealing efficiency. Ideal for heavy grade strapping available in 12mm or 16mm - state size when ordering.

12mm PPC12  
16mm PPC16



use PMAG12 Magazine Seals

CMP12 - 12mm heavy duty magazine combi tool for polyprop strapping. Magazine auto seal feed - saves time and money. Simple and easy to operate, high tension capacity, optimum sealing efficiency. Available in 12mm or (16mm on request.)

**CMP12**

- Lightweight Combination Tool for flat packages. (i.e. pallets, bales, crates, cases etc.)
- Can be used with polyprop or polyester strap.
- The windlass tensioning system provides very high strap tension.
- Special serrated seals and sealing mechanism guarantee very high seal joint efficiency.



Strap Specification  
For polypropylene and polyester strapping no adjustment is required for strap thickness 0.40mm - 0.90mm

use SER serrated

**RSK12/16 Combination Tool**

SHC12/16 heavy duty combination tool for use with polyprop and polyester strapping. The SHC uses serrated seals for optimum seal efficiency. The SHC is capable of applying exceptionally high tension especially on Polyester strapping and is ideal for horizontal and vertical strapping applications even in the most demanding environments.



Strap Specification for polyprop and polyester strapping.  
Widths 12mm - 16mm.  
Thicknesses 0.50mm - 0.90mm.  
Please give strap specifications when ordering.

use SER serrated

**SHC12 SHC16**

The LPC is a lightweight Combination Tool for use with polyprop and polyester strapping. The LPC uses serrated seals for optimum seal efficiency. The windlass tensioning system allows very high strap tension. An ideal tool for a variety of applications for both vertical and horizontal strapping.



Strap Specification for polyprop and polyester strapping.  
Widths 11mm - 16mm.  
Thicknesses 0.50mm - 0.90mm.  
LPC13: 11-13mm LPC16: 15-16mm  
Please give strap specifications when ordering.  
Also known as a Konrad Tool.

use SER serrated

**LPC12 LPC16**

## Polyprop Strapping Tensioners



TST30 - Standard tensioner for polyprop strapping up to 16mm

Pro-series **TST30**



TB301C - Heavy duty tensioner for polyprop strapping up to 19mm

Pro-series **TB301C**



HPT50 - Heavy duty tensioner for polyprop and polyester strapping up to 19mm

**HPT50**



OXT50 - Heavy duty tensioner for polyprop, polyester and corded strapping up to 19mm

**OXT50**

One way clutch roller bearing. Six cylinder windlass allows for easy loading. Steel tension handle for long-life use. Sharp gripper teeth for high tensioning polyester strapping.

TS3215 - Budget tensioner for polyprop strapping up to 16mm



Pro-series **TS3215**

MPT - Compact tensioner for polyprop strapping up to 16mm



Pro-series **MPT**

PRT 12 - 12mm bundling tensioner for round packs.

use SC12 seals

Pro-series










**PRT 12**

## Polyprop Sealers

 <p>2.0kg</p>  <p>SGP12 - use SO34 seals, SO1232 H.D. Seals or SC12 closed seals SGP16 - use SO16 seals or SO1632 H.D. Seals</p> <p>SGP12/16 - 12mm/16mm standard polyprop strap sealer. Please state size when ordering.</p>	 <p>2.25kg</p>  <p>PSH12 - use SO34 seals, SO1232 H.D. Seals or SC12 closed seals, PSH16 - use SO16 seals or SO1632 H.D. Seals</p> <p>PSH12/16 - 12mm/16mm heavy duty polyprop strap sealer with high efficiency sealing jaws. Please state size when ordering.</p>	 <p>2.0kg</p>  <p>use SER12/16 serrated seals</p> <p>KNS12/16 - 12mm/16mm polyprop strap sealer with offset jaws. Designed for use with SER serrated seals for improved seal efficiency. State size when ordering.</p>	 <p>2.25kg</p>  <p>use SER12/16 serrated seals</p> <p>OFH12/16 - 12mm/16mm heavy duty polyprop strap sealer with offset jaws. Designed for use with SER serrated seals for improved seal efficiency. State size when ordering.</p>
Pro-series 12mm SGP12 16mm SGP16	12mm PSH12 16mm PSH16	Pro-series 12mm KNS12 16mm KNS16	12mm OFH12 16mm OFH16

## Extruded Polyester Strapping Tools

<p>HPT50 - Heavy duty tensioner for polyester and polyprop strapping up to 19mm.</p>  <p>13kg</p>	<p>QRS - Heavy duty tensioner for polyprop and polyester strapping up to 19mm. Innovative gripper mechanism and unique windlass return for faster and easier strap loading.</p>  <p>1.85kg</p>	<p>OXT50 - Heavy duty tensioner for polyprop, polyester and corded strapping up to 19mm.</p>  <p>2.2kg</p> <p>One way clutch roller bearing. Six cylinder windlass allows for easy loading. Steel tension handle for longlife use. Sharp gripper teeth for high tensioning polyester strapping.</p>
HPT50	QRS	OXT50
<p>KNS 12/16 - 12mm/16mm polyester strapping sealer with offset jaws. Designed for use with serrated seals for improved seal efficiency. State size when ordering.</p>  <p>2.0kg</p> <p>use SER serrated</p>	<p>OFH 12/16 - 12mm/16mm heavy duty polyester strapping sealer with offset jaws. Designed for use with serrated seals for improved seal efficiency. State size when ordering.</p>  <p>2.25kg</p> <p>use SER serrated</p>	<p>QOS - 12mm and 16mm polyester strapping sealers for use with serrated seals. The QOS features a unique staggered, symmetrical jaw which eliminates the need to orientate the tool when sealing.</p>  <p>2.3kg</p> <p>use SER serrated</p> <p>Use this tool without having to match the jaws with the seal - Saves time and reduces risk of seal failure</p>
Pro-series 12mm KNS12 16mm KNS16	12mm OFH12 16mm OFH16	12mm QOS12 16mm QOS16
<p>QOS19 - Heavy duty polyester strapping sealer for use with SER19SG 19mm serrated seals. Ideal for heavy duty applications where 19mm strap can provide increased breaking strain. Unique jaw design for reduced sealing effort.</p>  <p>44kg</p> <p>use SER serrated</p>	<p>QXS - Heavy duty tensioner for polyester strapping up to 32mm wide and up to 1.3mm thick. Ideal for use with the QOS19 sealer. Advanced design for the heaviest PET applications. Patented vertical gripper motion allows for easy strap release and greater holding power. High quality casting ensures maximum durability.</p>  <p>31kg</p>	 <p>use HMAG seals</p> <p>CMH12/16 - 12mm/16mm heavy duty magazine combination tool for polyester strapping up to 0.8mm. Magazine auto seal feed - saves time and money. Simple and easy to operate, high tension capacity, optimum sealing efficiency. Available in 12mm and 16mm. State size when ordering.</p>
QOS19	QXS	12mm CMH12 16mm CMH16





## Battery Powered Friction Weld Strapping Tools for Polyprop & Polyester Strapping

4.5kg




### Improved Li-ion Battery Pack

The TVX Li-ion battery powered tool is one of the fastest on the market - in less than three seconds, the strap is tensioned, sealed and cut. The ergonomic and rugged design assists maximum operator comfort, with minimal effort. Packages such as boxes, pallets, bales and crates can be safely strapped. Strap feeding is extremely simple, with both straps being inserted together. The TVX has an exceptional tension range and applies up to 240kg (2400N) with ease. The flexible sealing mode allows you to choose from semi-automatic or single button fully automatic operation.



Strap Specification	
Polyester:	0.4mm - 1.05mm
Polyprop:	0.7mm - 1.05mm
Strap width:	9mm, 12mm, 16mm
	Please specify when ordering
Strap tension:	Fully adjustable up to 240kg (2400N)
	(max ten. depends on strap spec)
Tool weight inc. battery:	4.5 kilos



Friction Weld Seal



### TVX12-LI (12mm) TVX16-LI (16mm)

3.4kg



Friction Weld Seal

Please ensure your client is running PET with the new ZXT, if they are using a PP -please clearly state on order so the tool can be converted and commission prior to despatch.

The new ZXT1216 18V Li-ion battery-powered strapping tool features some of the most advanced benefits available on the market today:

- Patented brushless single motor design provides extremely long service life.
- New 18V 3000mAh high-capacity battery provides increased productivity.
- Increased tension range of up to 250Kg.
- Patented strap gripper design for improved tension.
- Single handed operation.
- Soft mode for light or fragile packages.
- Lightest model in its class (3.5 Kg including battery).
- Pre-programmed touch panel with digital signal to suit different applications.
- Suitable for polyprop\* and polyester strapping.
- Extremely simple strap feed, with both straps being inserted together.
- Strap is tensioned and sealed and cut quickly and efficiently.

\*Please ensure you use PET with the new ZXT if you are using a PP -please clearly state on order so the tool can be converted and commissioned prior to despatch.



Strap Specification	
For Polyprop strapping/polyester strapping	
Strap width	12 or 16mm, please state when ordering.
Strapping thickness range	0.60 - 1.27
Straps per cycle per charge	400*
Tool weight including battery	3.5 Kilo
Tool dimensions with Li-ion battery	330 X 150 X 125mm
Battery charger voltage	230v
Recharge time	30 Minutes

\*Please note strapping cycles of full battery vary based upon strap quality, specification, set tension, set sealing time, operation habits, ambient environment and tensioning distance.

### ZXT1216






367kg



Strap Specification	
Tool Weight	3.9kg
Strap Requirements	PET or PP Strapping
Sealing Method	Friction Weld
Applied Tension Force	400-2500N
Strap Thickness Range	0.5 to 1mm
Strap Width Range	9mm to 16mm
Take-up Speed	220mm per second
Dimensions	334 x 138 x 148mm
Battery Type	Bosch 14.4v 2.6 amp Li-Ion
Charge Time	15 to 30 minutes
Cycles per Charge	200 to 400

The BXT is the latest generation of battery powered strapping tools. The balanced lightweight design is exceptionally comfortable to use, yet withstands heavy usage in the most demanding applications. Incorporating many advanced features including automatic and semi automatic functions, a new direct drive motor offering an increased tension range and a light setting for polyprop strapping, all controlled via the new digital Touch-Pad controller. These improved operating features result in a tool that is faster and easier to operate, has better process control, more cycles per battery charge and has low maintenance costs. The new BXT models are also powered by an improved lithium ion battery pack that can be charged when convenient to the operator rather than waiting until the battery is fully drained. The new battery also offers an improved 15-30 minute recharging time, up to 50 % more cycles compared to NiCad batteries and is more environmentally friendly due to it containing no Cadmium. The new BXT models can also be adapted to use main power with the optional power kit.



Friction Weld Seal

## BXT216 / BXT21916 / BXT21919

34kg



Please ensure your client is running PET with the new ZXT, if they are using a PP -please clearly state on order so the tool can be converted and commissioned prior to despatch.



Friction Weld Seal



The new ZXT1619HT 18V Li-ion battery-powered strapping tool features some of the most advanced benefits available on the market today:

- Patented brushless single motor design provides extremely long service life.
- The new 18V 3000mAh high capacity battery provides increased productivity.
- Increased tension range of up to 400Kg.
- Patented strap gripper design for improved tension.
- Single handed operation.
- Soft mode for light or fragile packages.
- Lightest model in its class (3.5Kg including battery).
- Pre-programmed touch panel with digital signal to suit different applications.
- Suitable for polyprop\* and polyester strapping.
- Extremely simple strap feed, with both straps being inserted together.
- Strap is tensioned, sealed and cut quickly and efficiently.

\*Please ensure you use PET with the new ZXT if you are using a PP -please clearly state on order so the tool can be converted and commissioned prior to despatch.



Strap Specification	
For Polyprop strapping/polyester strapping	
Strap width	16 or 19mm, please state when ordering.
Strapping thickness range	0.65 - 1.27
Straps per cycle per charge	400*
Tool weight including battery	3.5 Kilo
Tool dimensions with Li-ion battery	330 X 150 X 125mm
Battery charger voltage	230v
Recharge time	30 Minutes

\*Please note strapping cycles of full battery vary based upon strap quality, specification, set tension, set sealing time, operation habits, ambient environment and tensioning distance.

## ZXT1619HT



## Cord and Composite Polyester Strapping Tensioners



1.25kg

use CB Buckles

CST20 - standard tensioner for woven and composite polyester strapping up to 19mm

Pro-series

CST20



2.2kg

use CB Buckles

HPT50 - Heavy duty tensioner for polypropylene, extruded polyester, cord and composite polyester strapping up to 19mm

HPT50



1.85kg

use CB Buckles

QPT - Heavy duty tensioner for composite and woven cord polyester strapping up to 19mm. Unique windless return mechanism for faster and easier strap loading.

QPT



use CB Buckles

CHD - Heavy duty tensioner for woven and composite polyester strapping up to 25mm

CHD



2.5kg

use CB Buckles

JTP low cost Jumbo tensioner for woven and composite polyester strapping up to 32mm/40mm.

Pro-series


JTP32  
up to 32mmJTP40  
up to 40mm

2.95kg

use CB Buckles


QXT38 - Heavy duty tensioner for composite and woven cord polyester strapping up to 38mm. The QXT38 features an advanced patented design for the heaviest applications.

QXT38

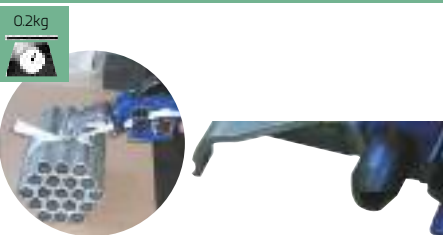

New CHD tensioner attachment for strapping round and irregular packs with corded polyester strapping. An ideal replacement for steel strapping.

CHD1316T CHD1925T

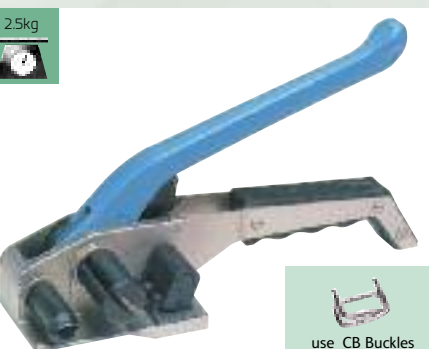

2.5kg

use CB Buckles

HDP40 - Heavy duty Optimax tensioner for composite and woven cord polyester strapping up to 40mm. Designed for heavy duty applications.

HDP40



use CB Buckles

PNU32 Heavy duty pneumatic tensioner for cord and composite polyester strapping. Ideal for use with heavy duty strap such as 32mm. The PNU32 applies high, uniform tension with ease.

Strap Specification  
Max air pressure. 7.0bar/100PSI  
Air consumption. 230LT/610LT/minute  
Strap specification. Cord & composite up to Widths 32 x 2.0mm.  
Strap tension. From: 2500n - 7500n  
Tool weight. 3.8kgs (8.36lb) without suspension bracket.

### Accessories


PNU-089900 Service unit - filter pressure control valve oiler combination, 5mm filter with metal protection basket and manual condensate drain  
PNU-089901 Heavy duty reinforced hose unit 10mtr  
PNU-038-900 Universal suspension bracket for horizontal & vertical operation  
TB24 Tool balance with safety device 2-4kgs 2mtr stroke

PNU32

## Steel Strapping Tensioners

**TLS20 Standard** tensioner for steel strapping up to 19mm. Designed for flat pack applications.

215kg



Pro-series

**TLS20**

**FP Heavy duty** tensioner for steel strapping up to 19mm. Designed for flat pack applications.

25kg


**FP**

**FPH Heavy duty** tensioner for steel strapping up to 32mm. Designed for flat pack applications.

27kg


**FPH**

**RP Heavy duty** tensioner for steel strapping up to 19mm. Designed for round and irregular packs such as pipes etc

30kg



use LAP seals with an SRD sealer


**RP**

**RPH Heavy duty** tensioner for steel strapping up to 32mm. Designed for round and irregular packs such as pipes etc

32kg



use LAP seals with an SRD sealer


**RPH**

## Steel Strapping Sealers Sealers for use with Lap-Over Seals

**SAS Heavy duty side action** steel strapping sealer. The side action sealing method is a real benefit to heavy duty application. Available in 19mm, 25mm or 32mm. State size when ordering.

365kg



use LAP Lapover seals


**SAS19 SAS25 SAS32**

**SRD Heavy duty steel** strapping single notch sealer. Ideal for heavy duty applications. Available in 13mm, 16mm and 19mm. State size when ordering.

11kg



use LAP Lapover seals


**SRD12 SRD16 SRD19**

**DNSA Heavy duty side action** double notch steel strapping sealer. The side action sealing method is a real benefit to heavy duty application. Available in 19mm, 25mm or 32mm. State size when ordering.

4.95kg



use LAP Lapover seals


**DNSA19 DNSA25 DNSA32**

## Steel Strapping Sealers Sealers for use with Snap-On Seals

**TS Standard steel** strapping sealer. Available in 13mm, 16mm and 19mm. State size when ordering.

0.95kg



use SOS snap on seals



Pro-series

**TS12 TS16 TS19**

**DNS Heavy duty steel** strapping double notch sealer. Ideal for heavy duty applications. Available in 13mm, 16mm and 19mm. State size when ordering.

115kg



use SOS snap on seals


**DNS12 DNS16 DNS19**





## Steel Strapping Combination Tools

Heavy duty steel sealless combination tool for flat pack applications. The QST is fully adjustable for 13mm, 16mm and 19mm. This tool has reversible punching dies for extended life. Please state size when ordering.

Sealless joint - no seals required



QST12 QST16 QST19

395kg



Heavy duty steel sealless combination tool for flat pack applications. The OHT is designed for use with high tensile and regular duty steel strapping. Fully interchangeable for 13mm/16mm and 19mm. This tool has reversible punching dies for extended life. Please state size when ordering.

Sealless joint - no seals required



OHT12 OHT16 OHT19

4.3kg



HTS Heavy duty steel strapping sealless combination tool for flat pack applications. High joint efficiency. Sealless joint - save cost of seals. High strap tension via 1-4:1 gear ratio. Available in 13mm, 16mm and 19mm. State size when ordering.

Sealless joint - no seals required




HTS12 HTS16 HTS19

4.15kg



TLN Steel strapping combination tool for light duty flat pack applications. This tool will tension, crimp seal and cut strapping. Available in 13mm, 16mm and 19mm. State size when ordering.



use TLN seals

Pro-series

TLN13 TLN19

4.0kg



PTS H.D. steel strapping sealless combination tool, pneumatic tensioning function for flat pack applications. Uniform strap tension through pre-selection of operating tension. Faster than a conventional sealless tool. Available in 13mm, 16mm and 19mm. State size when ordering.

Sealless joint - no seals required



PTS12 PTS16 PTS19

395kg



CRP Heavy duty steel strapping combination tool for round and irregular packs. Ideal for pipes and steel stockholders. Combined tensioner and sealer - no additional tools required. Available in 13mm, 16mm and 19mm. State size when ordering.



use LAP lapover seals



CRP12 CRP16 CRP19

4.3kg



**SAFEGUARD**  
SEALS



PAGE 70

## Steel Strapping Safety Cutters

 <p>SSC04 Steel strapping cutter. Ideal for use with TLS20, FP and FPH tensioners for cutting steel strapping from the dispenser.</p>	 <p>SSC06 Standard steel strapping safety cutter for steel strapping up to 25mm. The SSC06 has rubber pads that clamp the strapping either side of the blade allowing the strap to be cut safely without any of the usual hazards.</p>	 <p>SSC08 Heavy duty steel strapping safety cutter for steel strapping up to 32mm. The SSC08 has rubber pads that clamp the strapping either side of the blade allowing the strap to be cut safely without any of the usual hazards.</p>	 <p>SSC10 Heavy duty steel strapping safety cutter for steel strapping up to 50mm. The SSC10 is popular with timber importers and dock yards.</p>
Pro-series <b>SSC04</b>	Pro-series <b>SSC06</b>	 <b>SSC08</b>	Pro-series <b>SSC10</b>

## Strapping Dispensers

 <p>SD32 Mobile trolley for ribbon wound steel strapping</p>	 <p>Narrow width ribbon wound steel strapping coil holder - ideal for use in narrow aisle and manoeuvring between timber packs in saw mills for example. Fully adjustable for 12mm-32mm</p>	 <p>MW60 Mobile trolley for mill wound (oscillated) steel strapping</p>	 <p>Heavy duty dispenser for mill wound steel or polyprop/polyester on 406 core. Large capacity metal tool/seal box</p>
Pro-series <b>SD32</b>	Pro-series <b>NSD800</b>	Pro-series <b>MW60</b>	Pro-series <b>HDMW60</b>
 <p>PD40 Mobile dispenser for polyprop strapping on plastic reel.</p>	 <p>PSD4 Static dispenser for polyprop strapping on a plastic reel.</p>	 <p>PCS6 Static dispenser for composite polyprop strapping on 200mm diameter x 150mm/190mm wide core.</p>	 <p>PMC80 Mobile dispenser for composite polyprop strapping on cardboard core 200 mm diameter x 150/190mm wide core</p>
Pro-series <b>PD40</b>	Pro-series <b>PSD4</b>	Pro-series <b>PCS6</b>	Pro-series <b>PMC80</b>
 <p>PTD406 Mobile dispenser for polyprop / polyester strapping on cardboard core. 406mm diameter x 150mm wide core</p>	 <p>CSD3 Static dispenser for woven polyester strapping. (Except WPH105)</p>	 <p>CSM20 Mobile dispenser for woven polyester strapping. (Except WPH105)</p>	 <p>Many tools returned for repair have been dropped. This new work station prevents this and enables the operator to strap pallet with ease. Available for horizontal or vertical applications on a variety of coil types.</p>
Pro-series <b>PTD406</b>	Pro-series <b>CSD3</b>	Pro-series <b>CSM20</b>	<b>FWTWS Friction Weld Tool Work Station</b>

### Replacement Tool Boxes

Code	R/TBOXS PD40, PMC80, CSD3, CSM20
R/TBOXL	SD32, MW60, PTD406

### Replacement Coil Retaining Pins

Code	R/PIN-1 Replacement Coil Retaining Pins
PDWHE	Wheel & Star Cap for PD40 & CSM20

### Brake Belts

Code	BLT406 Brake belt for PTD406/MW60
------	-----------------------------------



## Strapping Buckles

**optigrip®** High Performance Sheradised Metal Buckles - for Woven and Hotmelt Polyester Strapping

The sheradised coating on our Optigrip high performance buckles provides the best grip, preventing strap slippage and improving weather resistance



Code	Wire Thickness			
CB4S	13mm Optigrip Sheradised Buckles	3mm Ø	1000/box	9.85
CB5S	16mm Optigrip Sheradised Buckles	3.5mm Ø	1000/box	11.75
CB6S	19mm Optigrip Sheradised Buckles	3.8mm Ø	1000/box	16.90
CB8S	25mm Optigrip Sheradised Buckles	5mm Ø	400/box	14.55
CB10S	35mm Optigrip Sheradised Buckles	7mm Ø	250/Box	22.75

## Strapping Buckles

**galvex** Galvanised Buckles for Polyprop and Composite Strapping

Our Galvex range is recommended for use with polyprop and composite polyester strapping.



Code	Wire Thickness			
CB4G	13mm Galvex-Galvanised Buckles	3mm Ø	1000/box	8.00
CB5G	16mm Galvex-Galvanised Buckles	3.5mm Ø	1000/box	11.90
CB6G	19mm Galvex-Galvanised Buckles	3.8mm Ø	1000/box	16.40
CB8G	25mm Galvex-Galvanised Buckles	5mm Ø	500/box	14.55
CB10G	35mm Galvex-Galvanised Buckles	7mm Ø	250/box	22.75

## Strapping Buckles

Plastic Buckles for Polyprop Strapping



Code			
PB12	12mm White Plastic Buckles	1000/box	2.25
PB12BK	12mm Black Plastic Buckles	1000/box	2.25
PB12-HD	12mm White Heavy Duty Plastic Buckles	1000/box	2.25



## Stainless Steel Strapping

Stainless steel strapping  
Grade 201 x 0.726mm

### SBT Tensioner



Stainless steel band  
tensioning tool for  
12mm and 19mm strap

### SBK Buckle



		Qty/ Box
SBK12	12mm x stainless steel buckle (knockdown)	100
SBK19	19mm x stainless steel buckle (knockdown)	100

### RMR Hammer



8oz Ball Pein Hammer

### SSB Sassband



		Qty/ Box
SSB12	12mm x 30 mtr stainless steel band	1/Coil
SSB19	19mm x 30 mtr stainless steel band	1/Coil





## Strapping Seals

Seals for Polyprop and Polyester Strapping

12mm x 25mm x .5 Closed Seal 2000/Box	73kg /case		10mm x 25mm x .5 Semi Open Seals 2000/Box	4.95kg /case		12mm x 25mm x .5 Semi Open Seals 2000/Box	6.35kg /case	
SC12			SO10			SO34		
16mm x 25mm x .5 Semi Open Seals 2000/Box	79kg /case		12mm x 32mm x .6 Semi Open Seals 2000/Box	8.5kg /case		16mm x 32mm x .6 Semi Open Seals 2000/Box	9.75kg /case	
SO16			SO1232			SO1632		
16mm Optigrip Seal 1000/Box	170kg /case		13mm x 33mm x .6 Magazine Seals 2500/Box	12.9kg /case		12mm x 33mm x .8 Magazine Seals 2500/Box	16.3kg /case	
MAX16			PMAG12			HMAG12		
16mm x 33mm x .8 Magazine Seals 2500/Box	19.85kg /case							
HMAG16								

## Strapping Seals


Seals for Steel Strapping

 <p>For use with <b>TLN</b> Combination Tool Only</p>			13mm TLN Seals for use with TLN Tool 3000/Box	4.24kg /case		16mm TLN Seals 3000/Box	4.65kg /case	
			TLN13S			TLN16S		
						19mm TLN Seals 3000/Box	5.70kg /case	
						TLN19S		





# Upgrade to

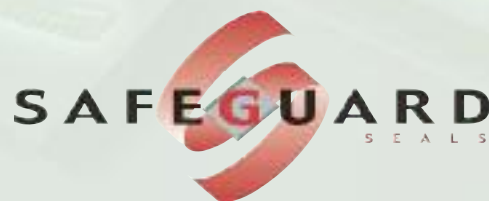

Through the strictest quality control and by using the finest materials available, **Safeguard Seals** are manufactured to the highest standards. This attention to detail has resulted in **Safeguard Seals** being able to offer the ultimate in seal integrity. Upgrade to **Safeguard** now for the very best in seal performance and peace of mind.



## Safeguard Strapping Seals

### Seals for Polyprop and Polyester Strapping

12mm x 25mm  
x .5  
Semi Open Seals  
1000/Box

4.5kg  
/case



SAFEGUARD




S034-SG

16mm x 25mm  
x .5  
Semi Open Seals  
1000/Box

5.5kg  
/case



SAFEGUARD



S016-SG

12mm x 32mm  
x .6  
Semi Open Seals  
1000/Box

4.5kg  
/case



SAFEGUARD




S01232-SG

16mm x 32mm  
x .6  
Semi Open Seals  
1000/Box

4.7kg  
/case



SAFEGUARD



S01632-SG

12mm x 30mm  
Serrated Seals  
1000/Box  
Equivalent to  
KONRAD

6.4kg  
/case



SAFEGUARD



SER12-SG

16mm x 30mm  
Serrated Seals  
1000/Box  
Equivalent to  
KONRAD

9.6kg  
/case



SAFEGUARD



SER16-SG

19mm x 31.8mm  
Serrated Seals  
1000/Box

9.6kg  
/case



SAFEGUARD




SER19-SG

Magazine Seals  
for AL38 steel  
magazine  
strapping tool  
7000/Box

10.0kg  
/case



SAFEGUARD




38.AL.R-SG

Magazine Seals  
for AMT  
polyester  
magazine  
strapping tool  
1800/Box

19.2kg  
/case



SAFEGUARD



58-AMTG-SG

## Safeguard Strapping Seals Seals for Polyprop and Polyester Strapping

Other Magazine Seals available on request.

Magazine Seals  
for AL12 steel  
magazine  
strapping tool  
10500/Box

16.5kg  
/case



SAFEGUARD




12.AL.R-SG

Magazine Seals  
for AMP58/34  
and AM58/34  
steel magazine  
strapping tool  
6000/Box

20.5kg  
/case



SAFEGUARD




58/34AMP.R-SG

Magazine Seals  
for AM12 and  
AMP12 steel  
magazine  
strapping tool  
7000/Box

20.0kg  
/case



SAFEGUARD




12 AMP.R-SG

## Safeguard Strapping Seals Seals for Steel Strapping

### FOR USE WITH TS & DNS SEALERS

13mm x 25mm x  
.5 Snap on Seal  
2000/Box

5.5kg  
/case



SAFEGUARD


Standard

SOS13-SG

SOS13

16mm x 25mm x  
.5 Snap on Seal  
2000/Box

6.4kg  
/case



SAFEGUARD


Standard

SOS16-SG

SOS16

19mm x 25mm x  
.5 Snap on Seal  
2000/Box

7.2kg  
/case



SAFEGUARD

Standard

SOS19-SG

SOS19

### FOR USE WITH SRD & SAS SEALERS

13mm x 25mm x  
.7 Lapover Seal  
2000/Box

8.8kg  
/case



SAFEGUARD

Standard

LAP13-SG

LAP13

16mm x 25mm x  
.7 Lapover Seal  
2000/Box

10.7kg  
/case



SAFEGUARD

Standard

LAP16-SG

LAP16

19mm x 25mm x  
.7 Lapover Seal  
2000/Box

12.3kg  
/case



SAFEGUARD

Standard

LAP19-SG

LAP19

### FOR USE WITH SAS & DNSAS SEALERS

19mm x 57mm x  
.7 Lapover Seal  
1000/Box

22.5kg  
/case



LAP1957-SG

25mm x 57mm x  
.9 Lapover Seal  
1000/Box

25.0kg  
/case



SAFEGUARD

LAP25-SG

32mm x 57mm x  
.9 Lapover Seal  
1000/Box

30.0kg  
/case




SAFEGUARD

LAP32-SG





## Edge Protectors

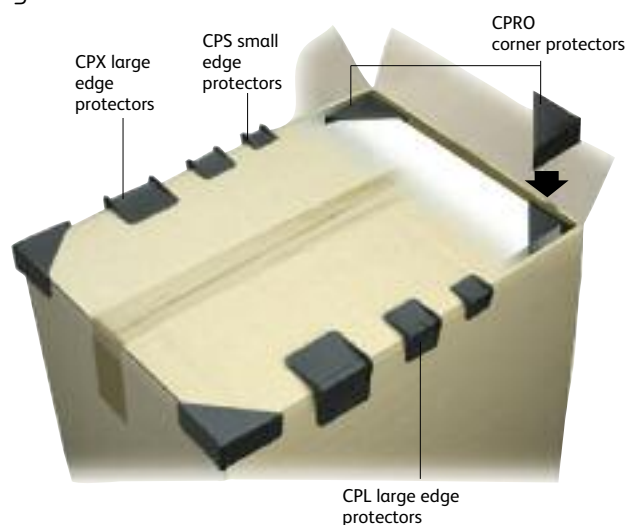

Code		Qty/Box	
<b>CPS</b>	Small plastic edge protectors 28mm x 25mm	2,000/Box	6.75
Usable width 19mm			
<b>CPL</b>	Large plastic edge protectors 37mm x 32mm	1,000/Box	4.20
Usable width 30mm			
<b>CPL-X</b>	Super large plastic corner pieces 48mm x 42mm	1,000/Box	
<b>CPX</b>	Extra large plastic edge protectors 57mm x 48mm	1,000/Box	5.05
Usable width 50mm			

## Expanding Corner Protectors



Code		Qty/Box	
<b>EXMCP</b>	Medium Expandable Corner Protectors to suit 16mm - 40mm	1,000	7.45
<b>EXLCP</b>	Large Expandable Corner Protectors to suit 35mm - 70mm	250	6.30

## Corner Protectors



Code		Qty/Box	
<b>C/PRO1</b>	60mm x 60mm x 28mm plastic corner protectors	1,000 /Box	8.20

## Closed Corner Protectors




Code		Qty/Box	
<b>CCP15</b>	60mm x 60mm x 15mm	1000	8.20
<b>CCP18</b>	60mm x 60mm x 18mm	1000	8.20
<b>CCP22</b>	60mm x 60mm x 22mm	850	8.20
<b>CCP28</b>	60mm x 60mm x 28mm	700	8.20
<b>HDRC40</b>	60mm x 60mm x 40mm H.D.	600	

## Pro-Tex Snap-Off Edge Protectors




Code		Qty/Box	
<b>PRO-TEX</b>	38mm x 66mm	550	

## Steel Strapping - Ribbon Wound

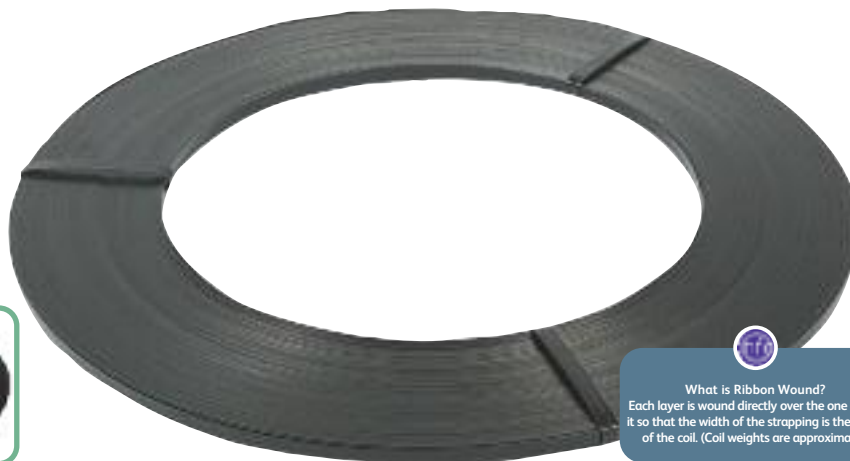


**What is Ribbon Wound?**  
Each layer is wound directly over the one below it so that the width of the strapping is the width of the coil. (Coil weights are approximate).

Code	Approx. Weight per coil.					Coils/ Pallet	
Ribbon Wound (RW range is 400mm I.D. Core 630mm O.D. - RWS range is 400mm I.D. Core 610mm O.D.)							
RW13	13mm x .5	Black	20Kg	395 Mtr	B/S 560Kg	31	20.0
RW16	16mm x .5	Black	25Kg	395 Mtr	B/S 720Kg	25	25.0
RW16-06	16mm x .6	Black	25Kg	395 Mtr	B/S 720Kg	25	25.0
RW19	19mm x .5	Black	30Kg	395 Mtr	B/S 850Kg	21	30.0
RW19Z	19mm x .5	Zinc Coated	30Kg	395 Mtr	B/S 850Kg	21	30.0
RW19-06	19mm x .6	Black	30Kg	336 Mtr	B/S 1000Kg	21	30.0
RW19-06Z	19mm x .6	Zinc Coated	30Kg	336 Mtr	B/S 1000Kg	21	30.0
RW25	25mm x .8	Black	41Kg	258 Mtr	B/S 1700Kg	18	41.0
RW32	32mm x .8	Black	48Kg	240 Mtr	B/S 2040Kg	22	48.0
RW32Z	32mm x .8	Zinc Coated	48Kg	240 Mtr	B/S 2040Kg	22	48.0
RWS13	13mm x .5	Black	16.5Kg	326 Mtr	B/S 560Kg	36	16.5
RWS16	16mm x .5	Black	21Kg	332 Mtr	B/S 720Kg	30	21.0
RWS19	19mm x .5	Black	24Kg	316 Mtr	B/S 850Kg	25	24.0

## Steel Strapping - Mill Wound (oscillation wound)



**What is Mill Wound?**  
Mill wound strapping is a larger coil than ribbon wound. The strapping is oscillated uniformly and tightly across the 63.5 mm (2 1/2") width of the core. (Coil weights are approximate).

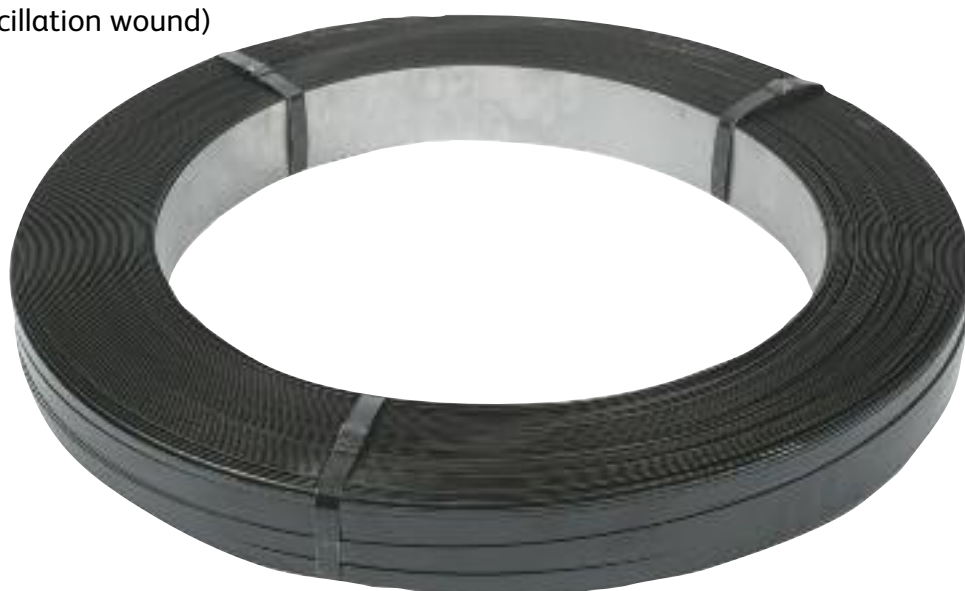

Code	Approx. Weight per coil					Coils/ Pallet	
MW13	13mm x .5	Black	50Kg	1010 Mtr	B/S 570Kg	12	50.0
MW13Z	13mm x .5	Zinc Coated	50Kg	1010 Mtr	B/S 570Kg	12	50.0
MW13-06	13mm x .6	Black	50Kg	838 Mtr	B/S 670Kg	12	50.0
MW13-06Z	13mm x .6	Zinc Coated	50Kg	838 Mtr	B/S 670Kg	12	50.0
MW16	16mm x .5	Black	50Kg	800 Mtr	B/S 730Kg	12	50.0
MW16Z	16mm x .5	Zinc Coated	50Kg	800 Mtr	B/S 730Kg	12	50.0
MW19	19mm x .5	Black	50Kg	675 Mtr	B/S 870Kg	12	50.0
MW19Z	19mm x .5	Zinc Coated	50Kg	675 Mtr	B/S 870Kg	12	50.0
MW19-06	19mm x .6	Black	50Kg	560 Mtr	B/S 1000Kg	12	50.0
MW19-06Z	19mm x .6	Zinc Coated	50Kg	560 Mtr	B/S 1000Kg	12	50.0



## Polyprop Hand Strapping




### BEST SELLERS

Our best selling product lines

Code	Width	Thickness	Length	Colour	Core	Qty/ Pallet	Ave. Break Strain	
TT40	12mm	.55	2,000Mtr	Black	Plastic Reel	60	145 Kilo	7.80
TT40W	12mm	.55	2,000Mtr	White	Plastic Reel	60	145 Kilo	8.40
TT5078	12mm	.8	1,200Mtr	Black	Plastic Reel	60	175 Kilo	7.90
TT45	12mm	.7	1,500Mtr	Black	Plastic Reel	60	185 Kilo	7.35
TT50	12mm	.8	1,300Mtr	Black	Plastic Reel	60	220 Kilo	7.35
TT50W	12mm	.8	1,300Mtr	White	Plastic Reel	60	220 Kilo	7.35
TT4470	12mm	.63	1,800Mtr	Black	Plastic Reel	60	220 Kilo	8.55
TT505	12mm	.8	1,000Mtr	Black	Plastic Reel	60	260 Kilo	7.10
TT512B	12mm	.8	1,200Mtr	Blue	Plastic Reel	60	270 Kilo	
TT5076	12mm	.76	1,400Mtr	Black	Plastic Reel	60	275 Kilo	8.10
TT55BK	12mm	.9	1,000Mtr	Black	Plastic Reel	60	300 Kilo	8.15
TT55BLU	12mm	.9	1,000Mtr	Blue	Plastic Reel	60	300 Kilo	8.15
TT55Y	12mm	.9	1,000Mtr	Yellow	Plastic Reel	60	300 Kilo	8.15
TT60	15mm	.75	1,200Mtr	Black	Plastic Reel	60	250 Kilo	7.75
TT65	15mm	.85	1,000Mtr	Black	Plastic Reel	60	300 Kilo	7.50
TT70	16mm	.96	750Mtr	Black	Plastic Reel	60	420 Kilo	8.70
CC1240	12mm	.55	2,000Mtr	White	200 x 150	48	130 Kilo	7.10
CC1245	12mm	.7	1,300Mtr	White	200 x 150	48	185 Kilo	6.00
CC12467	12mm	.8	1,000Mtr	Black	200 x 150	48	220 Kilo	6.00
CC1250	12mm	.8	1,300Mtr	White	200 x 150	48	220 Kilo	7.85
CC1255	12mm	.9	1,000Mtr	White	200 x 150	48	300 Kilo	7.10
CC1650	16mm	.8	800Mtr	Blue	200 x 150	48	350 Kilo	8.00



## Polyprop Machine Strapping

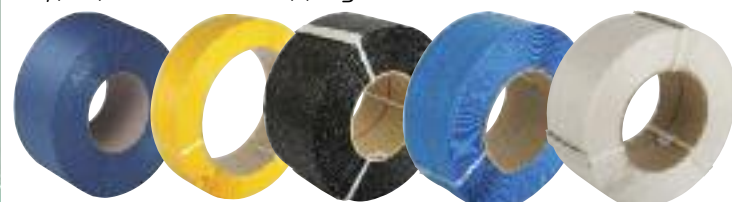

### BEST SELLERS

Our best selling product lines

Code	Width	Thickness	Length	Colour	Core	Qty/ Pallet	Ave. Break Strain	
MS540B	5mm	.4	6,500Mtr	Blue	200 x 190	60	60 Kilo	18.0
MS540	5mm	.4	6,500Mtr	White	200 x 190	60	60 Kilo	18.0
MS6	6mm	.55	5,000Mtr	White	200 x 190	60	80 Kilo	19.2
MS7W	7mm	.63	5,000Mtr	White	200 x 190	60	100 Kilo	24.5
MS7B	7mm	.63	5,000Mtr	Blue	200 x 190	60	100 Kilo	24.5
MS1537	9mm	.55	3,700Mtr	White	200 x 190	48	100 Kilo	20.45
MS15W	9mm	.55	4,000Mtr	White	200 x 190	48	110 Kilo	21.4
MS15B	9mm	.55	4,000Mtr	Blue	200 x 190	48	110 Kilo	21.4
MS2084	9mm	.60	3,300Mtr	White	200 x 190	48	110 Kilo	20.3
MS20	9mm	.63	4,000Mtr	White	200 x 190	48	140 Kilo	23.3
MS5033	12mm	.63	2,500Mtr	White	200 x 190	48	150 Kilo	18.8
MS30	12mm	.63	2,500Mtr	White	280 x 190	48	170 Kilo	18.8
MS35	12mm	.55	2,500Mtr	White	280 x 190	48	145 Kilo	17.7
MS4027	12mm	.55	2,700Mtr	White	200 x 190	48	135 Kilo	19.2
MS40	12mm	.55	3,000Mtr	White	200 x 190	48	145 Kilo	19.8
MS40BK	12mm	.55	3,000Mtr	Black	200 x 190	48	145 Kilo	19.8
MS45	12mm	.55	3,000Mtr	Blue	200 x 190	48	145 Kilo	19.8
MS50B	12mm	.63	3,000Mtr	Blue	200 x 190	48	170 Kilo	23.2
MS50BKHE	12mm	.63	3,000Mtr	Black	200 x 190	48	165 Kilo	
MS50	12mm	.63	3,000Mtr	White	200 x 190	48	170 Kilo	23.2
MS55BK	12mm	.80	1,500Mtr	Black	200 x 190	48	260 Kilo	
MS127	12mm	.70	2,200Mtr	Black	200 x 190	48	190 Kilo	23.7
MS128	12mm	.80	2,000Mtr	Black	200 x 190	48	270 Kilo	
MS60	12mm	.85	2,000Mtr	Blue	200 x 190	48	260 Kilo	24.3
MS60Y	12mm	.85	2,000Mtr	Yellow	406 x 150	48	270 Kilo	
MS840*	12mm	.80	1,500Mtr	Blue	406 x 150	48	230 Kilo	10.9
MSP1208B*	12mm	.80	2,000Mtr	Blue	406 x 150	48	230 Kilo	13.45
MSP1275	12mm	.75	1,600Mtr	Black	280 x 190	48	240 kilo	9.2





The **strong, safe**  
alternative to steel strapping



Code	Width	Thickness	Length	Colour	Core	Ave. Break Strain (kg)	
<b>On Cardboard Core</b>							
PT2221-07T	9.2mm	x .7	3,000Mtr	Green Embossed		406 x 150	350 Kilo
PT1175	10.8mm	x .75	2,300Mtr	Green Embossed		406 x 150	310 Kilo
ST1617	11.1mm	x .52	3,200Mtr	Green Smooth		406 x 150	225 Kilo 24.1
PT2240-080T	11.7mm	x .8	1,800Mtr	Green Embossed		406 x 150	360 Kilo
PT1253	12mm	x .5	3,000Mtr	Green Embossed		406 x 150	255 Kilo 20.15
PT20	12.5mm	x .6	2,500Mtr	Green Embossed		406 x 150	270 Kilo 22.35
PT30	12.5mm	x .7	2,000Mtr	Green Embossed		406 x 150	350 Kilo 21.5
PT35	12mm	x .85	1,800Mtr	Green Embossed		406 x 150	360 Kilo 21.2
PT2252-1.1T	12mm	x 1.1	1,300Mtr	Green Embossed		406 x 150	420 Kilo
PT1560	15.5mm	x .6	2,000Mtr	Green Embossed		406 x 150	410 Kilo 22.6
PT40	15.5mm	x .7	1,750Mtr	Green Embossed	PTD406	406 x 150	440 Kilo 23.7
PT40-S	15.5mm	x .7	1,750Mtr	Green Smooth		406 x 150	440 Kilo
O2PET158	15.5mm	x .85	1,500Mtr	Green Embossed		406 x 150	550 Kilo 19.4
BKPET158	15.5mm	x .85	1,500Mtr	Black Embossed		406 x 150	550 Kilo 22.3
PT50	15.5mm	x .9	1,500Mtr	Green Embossed		406 x 150	560 Kilo 22.7
PT60	15.5mm	x 1.1	1,000Mtr	Green Embossed		406 x 150	720 Kilo 24.7
PT70	19mm	x .8	1,200Mtr	Green Embossed		406 x 150	660 Kilo 21.6
PT90	19mm	x 1.0	1,000Mtr	Green Smooth		406 x 150	850 Kilo 23.75
<b>On Plastic Reel</b>							
PTR1250	12.5mm	x .55	1,250Mtr	Green Embossed		Plastic Reel	270 Kilo
PTR25	12.5mm	x .55	1,600Mtr	Green Embossed		Plastic Reel	270 Kilo 16.38
PTR25BK	12.5mm	x .55	1,600Mtr	Black Embossed		Plastic Reel	270 Kilo
PTR30	12mm	x .8	1,000Mtr	Black Embossed		Plastic Reel	390 Kilo 16.9
PTR45	15.5mm	x .7	1,200Mtr	Green Embossed		Plastic Reel	440 Kilo 16.8
PTR50	16mm	x .9	750Mtr	Black Embossed		Plastic Reel	580 Kilo 16.4
<b>Hylastic High Performance, Smooth Polyprop Strapping</b>							
HYS654	9mm	x .46	3,430Mtr	Black Smooth		200 x 190	135 Kilo
HY714	11.1mm	x .51	3,200Mtr	Black Smooth		406 x 150	180 Kilo 18.2
HY716	11.1mm	x .63	2,438Mtr	Black Smooth		406 x 150	225 Kilo 17.4
HY718	11.1mm	x .76	2,134Mtr	Black Smooth		406 x 150	270 Kilo 17.3
HYS716	10.8mm	x .63	2,040Mtr	Black Smooth		200 x 190	225 Kilo 13.1

## Polyprop Twine, Sisal String & Cotton String

Code	PT3	PT4	PT6	PT8	S2PLY	Breaking Strain	
PT3	Polyprop Twine				2 1/4 Kilo Balls x 700mtr/Kilo	8/Case	50kg 18.1
PT4	Polyprop Twine				2 1/4 Kilo Balls x 450mtr/Kilo	8/Case	80kg 18.1
PT6	Polyprop Twine				4 1/2 Kilo Balls x 280mtr/Kilo	4/Case	125kg 18.1
PT8	Polyprop Twine				4 1/2 Kilo Balls x 170mtr/Kilo	4/Case	205kg 18.1
S2PLY	Sisal Twine				2 1/2 Kilo Balls x 2 plyx300mtr	10/Case	54kg 25.0
S3PLY	Sisal Twine				2 1/2 Kilo Balls x 3 plyx200mtr	10/Case	82kg 25.0
FCS125	Cotton String				125g x 150m Ball	-	-
FCS250	Cotton String				250g x 130m Ball	-	-
FCS500	Cotton String				500g x 130m Ball	-	-

## Pal Probes



The quick and easy method for feeding strap under pallets

Suitable for Polyprop/Polyester/Steel strapping  
up to 19mm wide. Overall length 1400mm.

Code  
**PALP1**

0.7kg





## Woven Cord Polyester Strapping



78mm core.

For details on system strength please call



B/S: Linear Brake Strength  
S/S: System Strength



Per Coil

Code	Width x Length	B/S	S/S	Coils /Ctn	
WPH40	13mm x 1100mtr	375Kg	638Kg	2	8.40
WPH50	16mm x 850mtr	450kg	765kg	2	8.00
WPH55	16mm x 600mtr	600Kg	1020Kg	2	7.20
WPH60	19mm x 600mtr	550Kg	935Kg	2	6.25
WPH65	19mm x 500mtr	725Kg	1235Kg	2	7.70
WPH75	19mm x 500mtr	1100Kg	1870Kg	2	9.65
WPH85	25mm x 500mtr	950Kg	1615Kg	2	8.50
WP105	32mm x 300mtr	1500Kg	2550Kg	2	9.4
WPH105	38mm x 100mtr	2000Kg	3400Kg	4	3.60

## Composite Polyester Strapping

### Plastic Coated Cord Polyester



200mm x 190mm core.  
(\*CPS105 406mm x 150mm core)  
Use with Galvex Buckles  
For details on system strength please contact sales



B/S: Linear Brake Strength  
S/S: System Strength



Per Coil

Code	Width x Length	B/S	S/S	Coils /Ctn	
CPS40	13mm x 1100mtr	290Kg	493Kg	2	10.5
CPS50	16mm x 850mtr	410Kg	697Kg	2	11.2
CPS60	19mm x 700mtr	450Kg	765Kg	2	10.65
CPS65	19mm x 650mtr	550Kg	935Kg	2	9.0
CPS85	25mm x 500mtr	785Kg	1335Kg	2	11.45
CPS105*	34mm x 400mtr	1400Kg	2380Kg	1	18.2

## Bale Press Strap



60mm x 160mm core. Coil ø mm

WP30 PB: 160  
WP40 PB: 180  
WP50 PB: 210



Per Coil

Code	Width x Length	B/S	Coils /Ctn	
WP30PB	9mm x 500mtr	280Kg	4	3.0
WP40PB	13mm x 500mtr	375Kg	4	3.0
WP50PB	16mm x 425mtr	450Kg	4	3.5

## Hotmelt Cord Polyester Strapping

### Non-Woven - Monofilament



78mm core.

For details on system strength please call



B/S: Linear Brake Strength  
S/S: System Strength



Per Coil

\* Available on request

Code	Width x Length	B/S	S/S	Coils /Ctn	
HMP40	13mm x 1100mtr	375Kg	638Kg	2	6.95
HMP1315	13mm x 1500mtr	375Kg	638Kg	2	9.0
HMP45	13mm x 750mtr	510Kg	867Kg	2	6.5
HMP50	16mm x 850mtr	450Kg	765Kg	2	6.3
HMP55	16mm x 600mtr	633Kg		2	
HMP60	19mm x 600mtr	550Kg	935Kg	2	5.65
HMP1612	16mm x 1200mtr	450Kg	765Kg	2	8.9
HMP65	19mm x 500mtr	725Kg	1232Kg	2	6.55
HMP85	25mm x 500mtr	1000Kg		2	

## Softex - Woven Cord Polyester Strapping



B/S: Linear Brake Strength  
S/S: System Strength



Softex strapping has been introduced for customers who require a softer and more flexible strap to our standard WP and WPH range. Softex material is supplied on a 76mm core.  
For details on system strength please call



Per Coil

Code	Width x Length	B/S	S/S	Coils /Ctn	
SWP55	16mm x 600mtr	620Kg	1054Kg	2	7.50
SWP65	19mm x 500mtr	740Kg	1258Kg	2	7.70



Vast stock  
available for  
immediate  
despatch



## TMS300 SEMI AUTOMATIC STRAPPING MACHINE



100kg


The TMS300 is a reliable semi automatic strapping machine. Simple to operate - feed the strapping around the package and the machine automatically tensions and heat seals the strap. Accepts polyprop machine strapping from 6mm - 16mm wide on 200mm or 280mm cores. Designed to provide a quick and efficient method of strapping single or multiple packages of varying sizes. The machine features external tension control, a safety cut-out switch when the top is opened and an enclosed cabinet design keeps that strapping clean and dust free.

<b>specifications</b>	
<b>model name</b>	TMS 300
<b>dimensions</b>	semi automatic strapping machine 920mm width x 595mm depth x 785mm height
<b>tension</b>	15-45kgs
<b>strap width</b>	6mm - 15.5mm
<b>strapping speed</b>	2.5 seconds / cycle (60Hz)
<b>power supply</b>	230v / 50Hz
<b>power consumption</b>	0.3kw



UPGRADE TO  
12 MONTH ON-SITE  
PARTS & LABOUR  
WARRANTY  
CALL FOR DETAILS

INSTALLATION &  
STAFF TRAINING  
AVAILABLE



INCLUDES  
12 MONTH PARTS  
OR RETURN TO  
BASE WARRANTY


## TRS600 AUTOMATIC STRAPPING MACHINE



220kg

The TRS600 Automatic machine is designed for strapping high volumes of cartons and packages. Simply place the pack under the arch - at the press of a button the machine automatically straps the pack. The TRS600 is capable of up to 27 straps per minute providing an efficient solution to your strapping needs. The main features are external tension control to suit pack application and a short feed sensor to prevent misfeeds. A range of arch sizes are available to suit your application.  
TRS600 PRODUCT CODES: 850 x 600 arch = TRS600/12  
1050 x 800 arch = TRS600/12L

<b>specifications</b>	
<b>model name</b>	TRS 600
<b>dimensions</b>	automatic strapping machine 1430mm width x 620mm depth x 1540mm height
<b>tension</b>	10-70kgs
<b>strap width</b>	9mm - 12mm - 15.5mm
<b>strapping speed</b>	2.2 seconds / cycle (60Hz)
<b>power supply</b>	230v / 50Hz
<b>power consumption</b>	1.2kw

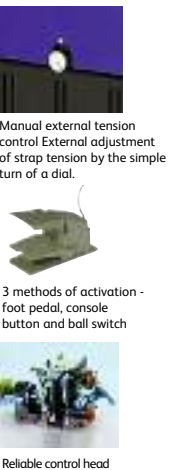

UPGRADE TO  
12 MONTH ON-SITE  
PARTS & LABOUR  
WARRANTY  
CALL FOR DETAILS

INSTALLATION &  
STAFF TRAINING  
AVAILABLE



INCLUDES  
12 MONTH PARTS  
OR RETURN TO  
BASE WARRANTY


## XCS550 SEMI AUTOMATIC STRAPPING MACHINE



75kg


The XCS550 is the new generation semi automatic strapping machine. Simple to operate - feed the strapping around the package and the machine automatically tensions and heat seal the strap. Designed to provide a quick and efficient method of strapping single or multiple packages of various sizes, the main features of the XCS550 include the 24v low voltage electric system for added safety; quiet, compact mechanical control head - for easy maintenance; electronic tension control and sensor controlled heater for easy and efficient operation.

<b>specifications</b>	
<b>model name</b>	XCS550
<b>dimensions</b>	semi automatic strapping machine 850mm width x 560mm depth x 780-950mm height
<b>tension</b>	8-45kgs
<b>strap width</b>	5mm - 13mm
<b>strapping speed</b>	2.5 seconds / cycle (60Hz)
<b>power supply</b>	230v / 50Hz
<b>power consumption</b>	0.3kw

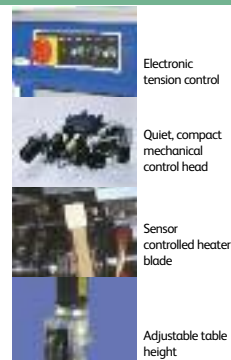

UPGRADE TO  
12 MONTH ON-SITE  
PARTS & LABOUR  
WARRANTY  
CALL FOR DETAILS

INSTALLATION &  
STAFF TRAINING  
AVAILABLE



INCLUDES  
12 MONTH PARTS  
OR RETURN TO  
BASE WARRANTY

## AFS900 EVOLVE AUTOMATIC STRAPPING MACHINE



220kg


The AFS900 Evolve automatic strapping machine is one of the most advanced in its class. Based on the TRS600 design and incorporating features such as auto strap feed for easy strap loading, short feed sensor and re-feed function to reduce mis-feeds, electronic tension control for quick and simple tension adjustment and auto loop ejector to eliminate down time.  
AFS900 PRODUCT CODES: 850 x 600 arch 9mm strap width = AFS900/9  
850 x 600 arch = AFS900/12 1050 x 800 arch = AFS900/12L

<b>Short Feed Sensor</b>	This sensor will detect whether the strap is at sealing position. If it is not, the start switch cannot be activated.
<b>Auto Strap Refeed</b>	The machine will automatically refeed itself if a mis-strap occurs.
<b>Strap End Ejector</b>	End of strap sensor ejects end of coil and prepares for next coil of strap.



UPGRADE TO  
12 MONTH ON-SITE  
PARTS & LABOUR  
WARRANTY  
CALL FOR DETAILS

INSTALLATION &  
STAFF TRAINING  
AVAILABLE



INCLUDES  
12 MONTH PARTS  
OR RETURN TO  
BASE WARRANTY






## HQS50 FASTRAC HIGH SPEED AUTO STRAP MACHINE



The HQS50 is a world class, innovative, high speed strapping machine - engineered and developed in Europe. The HQS50 is capable of up to 50 straps per minute and is designed for users such as print finishers, corrugated industry, news printers and applications where efficiency is paramount. Features such as one piece strap chute, loop ejector, auto strap feed, compact mechanical head and sensor controlled heater are just some of the features found on the HQS50 Fastrac machine.

**HQS50 PRODUCT CODES:** 500 x 400 arch = HQS50-1  
650 x 500 arch = HQS50-2

<b>specifications</b>	HQS50
<b>model name</b>	Fastrac high speed automatic strapping machine
<b>dimensions</b>	995mm width x 620mm depth x 1460mm height (650 x 500 arch)
<b>tension</b>	1-35 kgs
<b>strap width</b>	5mm, 6mm, 9mm
<b>strap speed</b>	50 straps/minute (60Hz)
<b>power supply</b>	230v/50/60Hz 1phase



**HQS50** Arch Size 500mm(w) x 400mm(h) x 5mm strap width


## HQS80 FASTRAC HIGH SPEED AUTOMATIC STRAPPING MACHINE

Fast Track HQS80 is an innovative, world class, high speed automatic strapping machine, equipped with all industry-standard features and several operator user friendly designs. The HQS80 offers optimal performance - highest speed, easiest maintenance and the most cost effective solution in its class today. Available for 5mm, 6mm, 9mm and 12mm strap sizes and also a variety of arch sizes. Prices on request.



Engineered and developed in Europe, the HQS80 is capable of up to 65 straps per minute and is designed for users such as print finishers, corrugated industry, news printers and applications where efficiency is paramount. Features such as the one piece strap chute, auto, auto strap ejector, centre control heater, adjustable table height, integral front foot bar switch and waist height auto strap feeding are just some of the exciting new features found on the new HQS80 Fastrac machine.

<b>specifications</b>	HQS80
<b>model name</b>	Fastrac high speed automatic strapping machine
<b>dimensions</b>	5 - 9mm machine, 1452mm high x 652mm depth x width depends on size of arch 12mm machine, 1525mm high x 652mm depth x width depends on size of arch
<b>tension</b>	5 - 9mm, 1 - 35kg 12mm, 1 - 45kg
<b>strap width</b>	5mm, 6mm, 9mm and 12mm
<b>strap speed</b>	65 straps/minute
<b>power supply</b>	230 volt, 50/60Hz, 1 phase



**HQS80/1-5** Arch Size 550mm(w) x 400mm(h) x 5mm strap width

## PLR100 LOW LEVEL SEMI AUTOMATIC STRAPPING MACHINE



The PLR100 is a reliable, semi-automatic strapping machine based on the popular TMS300 design but with a low-level table top height designed for heavy export packs and large packages. Simple to operate, feed the strapping around the package and the machine will automatically tension and heat seal the strap.

<b>specifications</b>	PLR 100
<b>model name</b>	Low level semi automatic strapping machine
<b>dimensions</b>	1476mm width x 582mm depth x 355mm height
<b>tension</b>	15-45kgs
<b>strap width</b>	6mm - 15.5mm
<b>strapping speed</b>	2.5 seconds / cycle (60Hz)
<b>power supply</b>	240v 50/60Hz
<b>power consumption</b>	0.25kw

## AS400 STAINLESS STEEL SIDE SEAL SEMI AUTOMATIC MACHINE



The AS400 is based on the reliable TMS300 machine design, manufactured in a stainless steel cabinet with a side sealing function for applications such as marine environments, horticultural and timber packs, where water or debris from the pack would cause damage or corrosion to the mechanism of a standard semi automatic strapping machine.

<b>specifications</b>	AS 400
<b>model name</b>	stainless steel side seal semi automatic strap. machine
<b>dimensions</b>	675mm width x 1045mm depth x 1625mm height
<b>tension</b>	15-45kgs
<b>strap width</b>	6mm - 15.5mm
<b>strapping speed</b>	2.5 seconds / cycle (60Hz)
<b>power supply</b>	240v 50/60Hz
<b>power consumption</b>	0.25kw



## MH500M HORIZONTAL STRAPPING MACHINE

### Ergonomic and economic solution for horizontal low volume pallet strapping

#### Various applications

Suitable for fruit and vegetable boxes, concrete blocks and palletised cartons of product.

#### Adjustable Strapping Height

The strapping height is quickly and effortlessly adjustable. Allows strapping 190mm from the floor up to 2000mm.

#### Control panel on both sides

With the control panel on both sides of the machine, operation is easy.

#### Easy to change the coil

The ergonomic positioning of the strap dispenser makes strapping coil changes convenient and energy-saving.

#### Mobility

With big wheels for high mobility, it is easy to move around.

#### Optional feature

For battery power version order MH500B - price on application.

#### specifications

model name	MH500M horizontal strapping machine
tension	PP 15kg-45kgs
strapping type	12mm machine strapping on 200 x 190 strapping core
strap width	9mm - 15.5mm
power supply	230v / 50/60Hz 1 phase
machine weight	260 kgs

MH500M Mains Powered Machine  
Also available in battery-powered version (MH500B)



UPGRADE TO 12 MONTH ON-SITE PARTS & LABOUR WARRANTY CALL FOR DETAILS

INSTALLATION & STAFF TRAINING AVAILABLE



INCLUDES 12 MONTH PARTS OR RETURN TO BASE WARRANTY

## PS800 PALLET STRAPPING MACHINE

FOR USE WITH POLYPROP & POLYESTER STRAPPING

### New pallet strapping machine with automatic retractable probe

The PS800 Pallet Strapping Machine eliminates manual tools and dispensers, and automatically feeds strap through the pallet void.

This reduces time and worker fatigue and is a cost effective solution to your pallet strapping operation.

#### specifications

model name	PS800 automatic pallet strapping machine
dimensions	550mm width x 1017mm depth x 973mm height
tension	PET 20kg-150kgs PP 20kg-100kgs
strap width	9mm - 15.5mm with 406mm core
sealing	friction weld for PP and PET strap
min package height	560mm
sword length	1250mm (adjustable)
power supply	230v / 50/60Hz
machine weight	175 kgs



UPGRADE TO 12 MONTH ON-SITE PARTS & LABOUR WARRANTY CALL FOR DETAILS

INSTALLATION & STAFF TRAINING AVAILABLE



INCLUDES 12 MONTH PARTS OR RETURN TO BASE WARRANTY



**Max tension up to 150kg**  
Stronger than all other semi-auto pallet strapping machines at this level

**Dispenser with 406mm core**  
Good for use with 406mm core PET straps (200mm & 280mm core are also available)

**Friction Weld Sealing**  
Guarantees reliable joint and high seal efficiency for both P.P. & PET straps.

**Error Indicator on PCB**  
Able to diagnose the problem operation errors quickly. Easy trouble-shooting and user-friendly.

#### Other Features Include:

Auto strap ejector (looper)

Short feed sensor

Electronic tension control



Friction Weld Seal



#### Telescopic Gripper Track

To reduce floor space and chance of damage, the patented 'Telescopic Gripper Track' automatically retracts inside the machine frame when the strapping cycle is complete

### Other Machines Available:







# PLASTIC PALLETS

Our New range of nestable, open deck, lightweight plastic pallets

A range of robust, durable plastic pallets that offer a highly cost effective option with a much greater life expectancy than wood. Perfect for the Fresh Produce, IT, Engineering and Pharmaceutical business sectors where hygiene and clean working environments are essential.

Code	Description	Size (mm)	Weight Load	Dynamic Load	Static	Colour
6040	Plastic Nestable Display Pallet	600 x 400	>1kg	N/A	150g	Grey
6080	Plastic Nestable Half Euro Pallet	600 x 800	3.7kg	400kg	1200kg	Black
1208	Plastic Nestable Pallet	1200 x 800	5.4kg	800kg*	2500kg	Black
1210	Plastic Nestable Pallet	1200 x 1000	5.9kg	800kg*	2500kg	Black
1208IMP	Medium Duty Euro Pallet	1200 x 800	10kg	1000kg*	2500kg	Grey
1210HD3R	Heavy Duty Industrial 1 Tonne In Rack Pallet	1200 x 1000	17.9kg	2000kg	5000kg	Black PP
	with 3 runners					
1208PR	Plastic Runner for 1208 Pallet, increases dynamic load by 200kg					
1210PR	Plastic Runner for 1210 Pallet, increases dynamic load by 200kg					


\*1000kg when flat loaded



604




1208

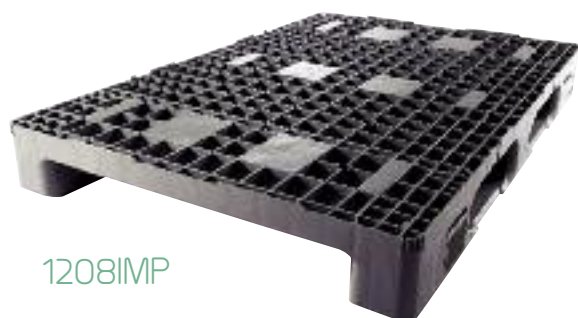


1208IMP



1210

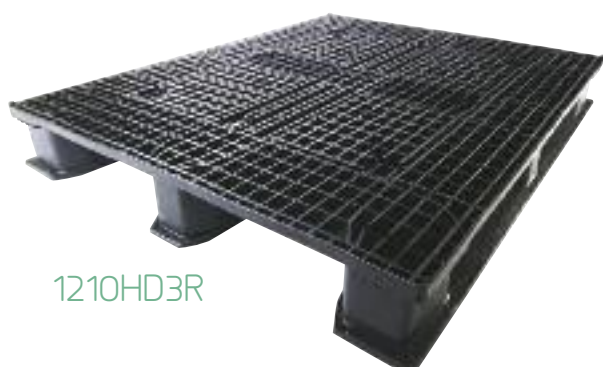

1210HD3R

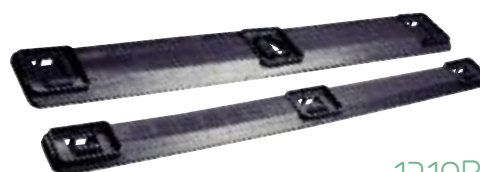

1210PR

Large stocks available. Other pallet specification available, please call for more details.